PBW15F

15 PB









High voltage pulse noise type : NAP series Low leakage current type : NAM series

*The Noise Filter is recommended to connect with several devices.

- ①Series name ②Dual output
- 3 Output wattage 4 Universal input
- ⑤Output voltage ⑥Optional *10 C:with Coating

 - G:Low leakage current
 - E :Low leakage current and EMI class A
 - T :Vertical terminal block
 - J :Connector type
 - N :with Cover

 - N1 :with DIN rail
 V :Output voltage setting potentiometer external-

Cover is optional

...........

MODEL		PBW15F-12	PBW15F-15
MAX OUTPUT WATTAGE[W] *		16.8	15.0
	VOLTAGE[V] *6	±12 (+24)	±15 (+30)
DC OUTPUT	CURRENT1[A]	0.7	0.5
	CURRENT2[A] *5	1.4	1.0

SPECIFICATIONS


	MODEL		PBW15F-12		PBW15F-15				
	VOLTAGE[V]		AC85 - 264 1 φ or DC110 - 370 (AC50 or DC70 Please refer to the instruction manual 2.1 Input voltage ★8)						
INPUT	CURRENT[A]	ACIN 100V	0.40typ (CURRENT1)						
	ACIN 200V		0.20typ (CURRENT1)						
	FREQUENCY[Hz]		50/60 (47 - 440) or DC						
	EFFICIENCY[%]	ACIN 100V	74typ (CURRENT1)		78typ (CURRENT1)				
	EFFICIENCY[%]	ACIN 200V	77typ (CURRENT1)		80typ (CURRENT1)				
			15typ (CURRENT1) (At cold start)						
			30typ (CURRENT1) (At cold start)						
			0.15/0.30max (ACIN 100V/240V 60Hz, Io=100%, According to IEC60950-1.DENAN)						
	VOLTAGE[V]		±12	/ (+24V reference number)	±15	/ (+30V reference number)			
	CURRENT1[A]		0.7	0.7	0.5	/ 0.5			
	CURRENT2[A]	*5	1.4	/ -	1.0	/ -			
	LINE REGULATION[m)	V] *9	60max	/ 96max	60max	/ 96max			
	LOAD REGULATION 1	[mV] *3	600max	/ 150max	600max	/ 150max			
	LOAD REGULATION 2	[mV] *4	750max	/ -	750max	/ -			
	RIPPLE[mVp-p]	0 to +50°C *1	120max	/ 240max	120max	/ 240max			
	KIPPLE[IIIVP-P]	-10 - 0℃ *1	160max	/ 320max	160max	/ 320max			
OUTPUT	RIPPLE NOISE[mVp-p]	0 to +50°C *1	150max	/ 300max	150max	/ 300max			
	MIPPLE NOISE[IIIVP-P]	-10 - 0℃ *1	180max	/ 360max	180max	/ 360max			
	 TEMPERATURE REGULATION[mV]	0 to +50℃	120max		150max				
	TEMPERATURE REGULATION[IIIV]	-10 to +50℃	150max		180max				
	DRIFT[mV]	*2	48max		60max				
	START-UP TIME[ms]		200typ(ACIN 100V, lo=100%) *Sta	art-up time is 700ms typ for less tl	han 1minute of applying input again	from turning off the input voltage.			
	HOLD-UP TIME[ms]		20typ (ACIN 100V, Io=100%)						
	OUTPUT VOLTAGE ADJUSTMENT		9.60 - 13.2 (+V and -V are simultaneously adjusted) 13.2 - 16.5 (+V and -V are simultaneously adjusted)						
	OUTPUT VOLTAGE SETTING[V]		11.5 - 12.5 (+V and -V CURRENT1) 14.4 - 15.6 (+V and -V CURRENT1)						
	OVERCURRENT PROTECTION			nt and recovers automatically					
PROTECTION CIRCUIT AND	OVERVOLTAGE PROTEC		16.8 - 24.0		20.0 - 29.0				
OTHERS	OPERATING INDICATION		LED (Green)						
	REMOTE ON/OFF		None						
	INPUT-OUTPUT		AC3,000V 1minute, Cutoff current = 10mA, DC500V 50M Ω min (At Room Temperature)						
ISOLATION	INPUT-FG		AC2,000V 1minute, Cutoff current = 10mA, DC500V 50MΩ min (At Room Temperature)						
	OUTPUT-FG		AC500V 1minute, Cutoff current = 25mA, DC500V 50MΩ min (At Room Temperature)						
	OPERATING TEMP., HUMID.AND		-10 to +71℃ (Required Derating), 20 - 90%RH (Non condensing) 3.000m (10.000feet) max						
ENVIRONMENT	STORAGE TEMP.,HUMID.AND	ALTITUDE	-20 to +75℃, 20 - 90%RH (Non condensing) 9,000m (30,000feet) max						
	VIBRATION		10 - 55Hz, 19.6m/s² (2G), 3minutes period, 60minutes each along X, Y and Z axis						
	IMPACT		196.1m/s ² (20G), 11ms, once each X, Y and Z axis						
SAFETY AND	AGENCY APPROVALS (At only	y AC input)							
NOISE	CONDUCTED NOISE		Complies with FCC Part15 classB, VCCI-B, CISPR22-B, EN55011-B, EN55022-B						
REGULATIONS	CE MARKING		Low Voltage Directive, EMC Directive						
	HARMONIC ATTENUA	TOR	Complies with IEC61000-3-2 (Not built-in to active filter *7)						
OTHERS	CASE SIZE/WEIGHT		31 x 78 x 85mm (without terminal	block) (W×H×D) / 200g max	(without cover)				
OTTLE IS	COOLING METHOD		Convection						

- *1 Measured by 20MHz oscilloscope or Ripple-Noise meter(equivalent to KEISOKU-GIKEN: RM101).
- *2 Drift is the change in DC output for an eight hour period
- after a half-hour warm-up at 25℃. *3 Figures for 0 to rated current 1.The current not measured side is fixed
- *4 Figures for 0 to rated current 2.The current not measured side is fixed.
- *5 The sum of +power -power must be less than output power.
- *6 ±12,±15 can be used as +24 and +30.
 *7 When two or more units are used, they may not comply with the harmonic attenuator. Please contact us for details.
- *8 Derating is required.
- *9 Figures to rated current 1.
- Parallel operation with other model is not possible.
- Derating is required when operated with cover.

 A sound may occur from power supply at peak loading.


 10 Please contact us about safety approvals for the model
- with option.

Block diagram

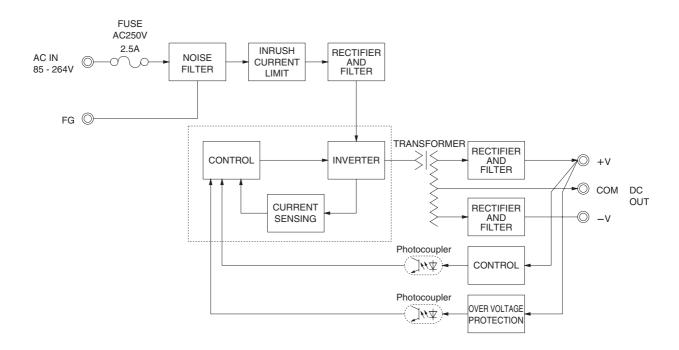


External view

※ External size of option T,J,N,N1 and V is different from standard model and refer to 7 Option of instruction manual for details.

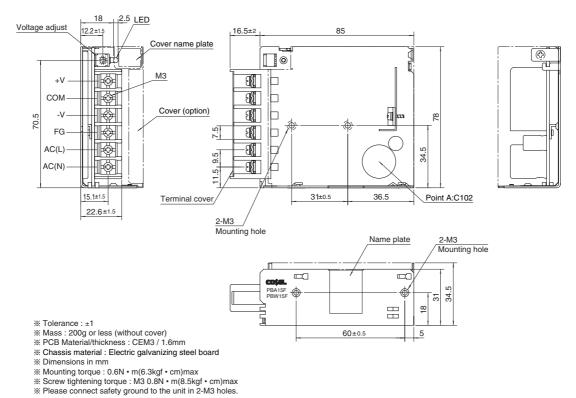

PBW30F

PB

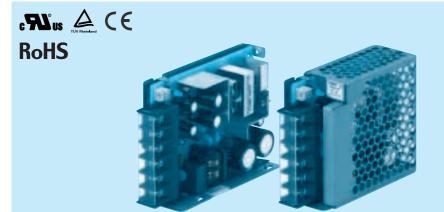

Recommended Noise Filter NAC-06-472

①Series name ②Dual output 3 Output wattage 4 Universal input

(§)Output voltage (§)Optional *10 C:with Coating G:Low leakage current

E :Low leakage current and EMI class A

T :Vertical terminal block

J :Connector type

N :with Cover

N1 :with DIN rail
V :Output voltage setting potentiometer external-

High voltage pulse noise type : NAP series Low leakage current type : NAM series *The Noise Filter is recommended to connect with several devices.

Cover is optional

MODEL		PBW30F-5	PBW30F-12	PBW30F-15
MAX OUTPUT WATTAGE[W] *5		15	31.2	30.0
DC OUTPUT	VOLTAGE[V] *6	±5 (+10)	±12 (+24)	±15 (+30)
	CURRENT1[A]	1.5	1.3	1.0
	CURRENT2[A] *5	2.0	1.7	1.4

SPECIFICATIONS


	MODEL		PBW30F-5	PBW30F-12		PBW30F-15			
	VOLTAGE[V]		AC85 - 264 1 ϕ or DC110 - 370 (AC50 or DC70 Please refer to the instruction manual 2.1 Input voltage $*8$)						
INPUT	OUDDENTIAL	ACIN 100V	0.4typ (CURRENT1)	0.7typ (CURRENT1)					
	CURRENT[A]	ACIN 200V	0.25typ (CURRENT1)	0.4typ (CURRENT1)					
	FREQUENCY[Hz]	'	50/60 (47 - 440) or DC						
	EFFICIENCY[0/]	ACIN 100V	75typ (CURRENT1)	77typ (CURRENT1)		78typ (CURRENT1)			
	EFFICIENCY[%]	ACIN 200V	75typ (CURRENT1)	81typ (CURRENT1)	81typ (CURRENT1)				
	INRUSH CURRENT[A]	ACIN 100V	15typ (CURRENT1) (At cold start)						
		ACIN 200V	30typ (CURRENT1) (At cold start)						
	LEAKAGE CURRENT[mA]		0.30/0.65max (ACIN 100V/240V 60Hz, Io=100%, According to IEC60950-1,DENAN)						
	VOLTAGE[V]		±5 / (+10V reference number) ±12	/ (+24V reference number)	±15	/ (+30V reference number)		
	CURRENT1[A]		1.5 / 1.5	1.3	/ 1.3	1.0	/ 1.0		
	CURRENT2[A]	*5	2.0 / -	1.7	/ -	1.4	/ -		
	LINE REGULATION[m\	/] * 9	20max / 36max	60max	/ 96max	60max	/ 96max		
	LOAD REGULATION 1	[mV] *3	250max / 100max	600max	/ 150max	600max	/ 150max		
	LOAD REGULATION 2	[mV] *4	500max / -	750max	/ -	750max	/ -		
	RIPPLE[mVp-p]	0 to +50°C * 1	80max / 240max	120max	/ 240max	120max	/ 240max		
	RIPPLE[IIIVP-p]	-10 - 0°C *1	140max / 320max	160max	/ 320max	160max	/ 320max		
OUTPUT	RIPPLE NOISE[mVp-p]	0 to +50°C *1	120max / 300max	150max	/ 300max	150max	/ 300max		
	RIPPLE NOISE[IIIVP-P]	-10 - 0℃ *1	160max / 360max	180max	/ 360max	180max	/ 360max		
	TEMPERATURE REGULATION[mV]	0 to +50℃	50max	120max		150max			
		-10 to +50℃	60max 150max			180max			
	DRIFT[mV]	*2	20max	48max		60max			
	START-UP TIME[ms]		200tpp(ACIN 100V, lo=100%) *Start-up time is 700ms typ for less than 1minute of applying input again from turning off the input voltage.						
	HOLD-UP TIME[ms]		20typ (ACIN 100V, Io=100%)						
	OUTPUT VOLTAGE ADJUSTMENT		4.99 - 6.00 (+V and -V are simultaneously adjusted	9.60 - 13.2 (+V and -V ard 11.5 - 12.5 (+V and		13.2 - 16.5 (+V and -V are			
	OUTPUT VOLTAGE SET		4.99 - 5.30 (+V and -V CURRENT1)	14.4 - 15.6 (+V and -	-V CURRENT1)				
DDOTECTION			Works over 105% of rated current and recovers automatically						
PROTECTION CIRCUIT AND	OVERVOLINGE PROTECTION[V]		6.90 - 10.0	16.8 - 24.0		20.0 - 29.0			
OTHERS	OPERATING INDICATION		LED (Green)						
	REMOTE ON/OFF		None						
	INPUT-OUTPUT		AC3,000V 1minute, Cutoff current = 10mA, DC500V $50M\Omega$ min (At Room Temperature) AC2,000V 1minute, Cutoff current = 10mA, DC500V $50M\Omega$ min (At Room Temperature)						
ISOLATION	INPUT-FG								
	OUTPUT-FG		AC500V 1minute, Cutoff current = 25mA, DC500V 50M Ω min (At Room Temperature)						
	OPERATING TEMP.,HUMID.AND	-	-10 to +71°C (Required Derating), 20 - 90%RH (Non condensing) 3,000m (10,000feet) max -20 to +75°C, 20 - 90%RH (Non condensing) 9,000m (30,000feet) max						
	STORAGE TEMP.,HUMID.AND	ALIIIUDE							
	VIBRATION			Hz, 19.6m/s ² (2G), 3minutes period, 60minutes each along X, Y and Z axis					
	IMPACT	10:1	196.1m/s ² (20G), 11ms, once each X, Y and Z axis						
SAFETY AND	AGENCY APPROVALS (At only CONDUCTED NOISE	y AC Input)							
	OCHDOOLED MOIDE		Complies with FCC Part15 classB, VCCI-B, CISPR22-B, EN55011-B, EN55022-B						
REGULATIONS	CE MARKING	rop.	Low Voltage Directive, EMC Directive	to poting filter at 7					
	HARMONIC ATTENUAT	IUK	Complies with IEC61000-3-2 (Not built-in 31 x 78 x 103mm (without terminal block)		ov (without oover)				
OTHERS				(VV X H X D) / 2/0g m	ax (without cover)				
	COOLING METHOD		Convection						

- Measured by 20MHz oscilloscope or Ripple-Noise meter(equivalent to KEISOKU-GIKEN: RM101).
- *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25℃.
- *3 Figures for 0 to rated current 1.The current not measured side is fixed.
- *4 Figures for 0 to rated current 2.The current not measured side is fixed.
- *5 The sum of +power -power must be less than output power.
- *6 ±5,±12,±15 can be used as +10,+24 and +30.
 *7 When two or more units are used,they may not comply with the harmonic attenuator. Please contact us for details.
- *8 Derating is required.
- *9 Figures to rated current 1.
- Parallel operation with other model is not possible.
- Derating is required when operated with cover.

 A sound may occur from power supply at peak loading.


 10 Please contact us about safety approvals for the model with option.

Block diagram

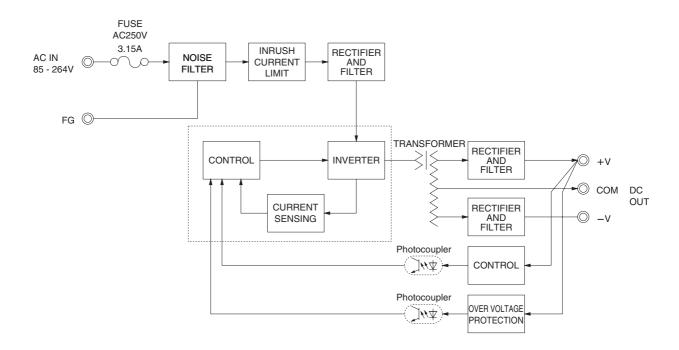

External view

* External size of option T,J,N,N1 and V is different from standard model and refer to 7 Option of instruction manual for details.

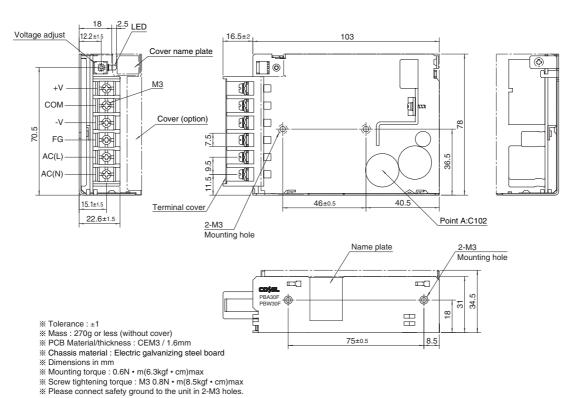

Ordering information

PBW50F

c Sus 🛕 CE **RoHS**

Recommended Noise Filter

- ①Series name ②Dual output 3 Output wattage
- ① Universal input

- (§)Output voltage (§)Optional *9 C:with Coating G:Low leakage current (0.15mA max / ACIN 240V)
 - E:Low leakage current and EMI class A (0.5mA max / ACIN 240V) T :Vertical terminal block

- J :Connector type
 R :with Remote ON/OFF
- N :with Cover
- N1 :with DIN rail
- V :Output voltage setting potentiometer external-

NAC-06-472	•



Cover is optional


MODEL		PBW50F-5	PBW50F-12	PBW50F-15
MAX OUTPUT WATTAGE[W] *6		30	50.4	51
	VOLTAGE[V] *8	±5 (+10)	±12 (+24)	±15 (+30)
DC OUTPUT	CURRENT1[A]	3.0	2.1	1.7
	CURRENT2[A] * 6	4.0	2.7	2.4

SPECIFICATIONS

	MODEL						PBW50F-15		
	VOLTAGE[V]		AC85 - 264 1 ϕ or DC120 - 370 (AC50 or DC70 Please refer to the instruction man			al 2.1 Input voltage *3)			
	ACIN 100V		0.45typ (CURRENT1)		0.70typ (CURRENT1)				
	CURRENT[A]	ACIN 200V	0.30typ (CURRENT1)		0.40typ (CURRENT1)				
	FREQUENCY[Hz]		50/60 (47 - 63)						
		ACIN 100V	7 76typ (CURRENT1)		81typ (CURRENT1)		81typ (CURRENT1)		
	EFFICIENCY[%]	ACIN 200V			83typ (CURRENT1)		83typ (CURRENT1)		
	POWER FACTOR(Io=100%)	ACIN 100V	0.98tvp		0.99typ).99typ			
		ACIN 200V	0.87typ		0.93typ				
		ACIN 100V	15typ (CURRENT1)	(At cold start)					
	INRUSH CURRENT[A]	ACIN 200V	30typ (CURRENT1)						
	LEAKAGE CURRENT[mA1	0.40/0.75max (ACIN 100V/240V 60Hz, lo=100%, According to IEC60950-1,DENAN)						
	VOLTAGE[V]		±5	/ (+10V reference number)	±12	/ (+24V reference number)	±15	/ (+30V reference number)	
	CURRENT1[A]		3.0	/ 3.0	2.1	/ 2.1	1.7	/ 1.7	
	CURRENT2[A]	*6	4.0	/-	2.7	/ -	2.4	/ -	
	LINE REGULATION[m	V1	20max	/ 36max	48max	/ 96max	60max	/ 96max	
	LOAD REGULATION 1		250max	/ 100max	600max	/ 150max		/ 150max	
	LOAD REGULATION 2		500max	/-	750max	1 -	750max	/ -	
		0 to +50°C *1	80max	/ 240max	120max	/ 240max		/ 240max	
	RIPPLE[mVp-p]	-10 - 0℃ *1	140max	/ 320max	160max	/ 320max		/ 320max	
OUTPUT		0 to +50°C *1	120max	/ 300max	150max	/ 300max		/ 300max	
	RIPPLE NOISE[mVp-p]	-10 - 0°C *1	160max	/ 360max	180max	/ 360max		/ 360max	
		0 to +50°C		γ σσστιαχ	120max	7 00011100	150max	, comax	
	TEMPERATURE REGULATION[mV]				150max		180max		
	DRIFT[mV]	*2			48max		60max		
	START-UP TIME[ms]		350typ(ACIN 100V, Io=100%)						
	HOLD-UP TIME[ms]		20typ (ACIN 100V, Io=100%)						
	OUTPUT VOLTAGE ADJUSTMENT RANGE[V]		4.99 - 6.00 (+V and -V are simultaneously adjusted)		9.60 - 13.2 (+V and -V are simultaneously adjusted)		13.2 - 16.5 (+V and -V are	simultaneously adjusted)	
	OUTPUT VOLTAGE SET	TING[V]	4.99 - 5.30 (+V and	-V CURRENT1)	,		14.4 - 15.6 (+V and -	V CURRENT1)	
	OVERCURRENT PROT	ECTION	Works over 105% of rated current and recovers automatically						
PROTECTION	OVERVOLTAGE PROTEC	CTION[V]				20.0 - 29.0			
CIRCUIT AND OTHERS	OPERATING INDICATION	ON	LED (Green)						
	REMOTE ON/OFF		Optional (Required e	external power source)					
	INPUT-OUTPUT · RC	*7		Cutoff current = 10mA					
ISOLATION	INPUT-FG		AC2,000V 1minute,	Cutoff current = 10mA	DC500V 50MΩ min (At Room Temperature)				
	OUTPUT · RC-FG	*7	AC500V 1minute, Cutoff current = 100mA, DC500V 50MΩ min (At Room Temperature)						
	OPERATING TEMP.,HUMID.AND	ALTITUDE							
ENVIRONMENT	STORAGE TEMP.,HUMID.AND	ALTITUDE							
	VIBRATION	10 - 55Hz, 19.6m/s ² (2G), 3minutes perio							
				1m/s ² (20G), 11ms, once each X. Y and Z axis					
	AGENCY APPROVALS (At only	y AC input)							
	CONDUCTED NOISE		Complies with FCC Part15 classB, VCCI-B, CISPR22-B, EN55011-B, EN55022-B						
REGULATIONS	CE MARKING		Low Voltage Directiv						
	HARMONIC ATTENUA	TOR	Complies with IEC61						
OTHERS	CASE SIZE/WEIGHT			thout terminal block) (W x H x D) / 280g ma	ax (without cover)			
	COOLING METHOD		Convection						

- Measured by 20MHz oscilloscope or Ripple-Noise meter(equivalent to KEISOKU-GIKEN: RM101).
- *2 Drift is the change in DC output for an eight hour period after a half-hour warm-up at 25 $\!\!\!\!\!^{\,\circ}\!\!\!\!\!^{\,\circ}$.
- *3 Derating is required.
- *4 Figures for 0 to rated current 1.The current not measured
- side is fixed.
- *5 Figures for 0 to rated current 2.The current not measured
- *6 The sum of +power -power must be less than output power.
- RC is applied to remote ON/OFF option. RC is isolated with input/output and FG.
- $\pm 5, \pm 12, \pm 15$ can be used as +10,+24 and +30. Parallel operation with other model is not possible.
- Derating is required when operated with cover.
- A sound may occur from power supply at peak loading.
 Please contact us about safety approvals for the model with option.

Block diagram

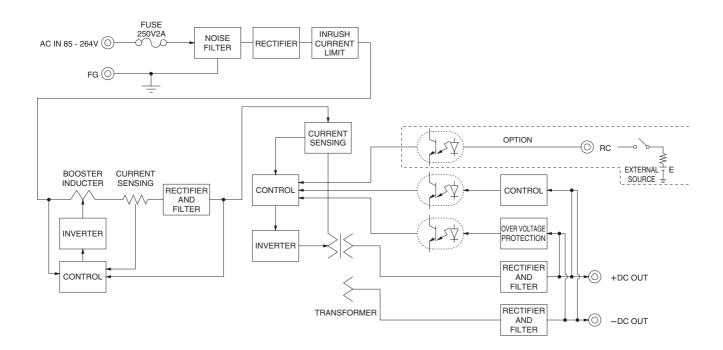

External view

※ External size of option T,J,R,N,N1 and V is different from standard model and refer to 7 Option of instruction manual for details.

